

3590EGT-IECEX3GD

3590EGT-IECEX3GD "TOUCH" : TOUCH SCREEN INDICATOR FOR Ex 2 & 22 ZONES



Weight indicator with a big touch screen display, for ATEX 2 & 22 hazardous zones.

ATEX/IECEX marking:

II 3G Ex nR IIC T6 Gc X (0°C ≤ Ta ≤ 50°C) for gases

II 3D Ex tc IIIC T85°C Dc IP65 X (0°C ≤ Ta ≤ 50°C) for dust.

ATEX/IECEX marking with intrinsically safe connection for load cells:

II 3G Ex nR [ia] IIC T6 Gc X (0°C ≤ Ta ≤ 50°C) for gases.

II 3D Ex tc [ia] IIIC T85°C Dc IP65 X (0°C ≤ Ta ≤ 50°C) for dust.

Suitable for advanced industrial applications, it's fitted with 3 serial ports, Ethernet communication port, configurable printouts and integrated alibi memory.

CE-M approvable (OIML R-76 / EN 45501).

Working in cooperation with:

SCALETEC LTD

903 TREMAINE AVENUE - 4414 - PALMERSTON NORTH - NEW ZEALAND
Tel. 0064 6 3765041
tonyj@scaletec.co.nz

**The best solution
for advanced industrial
applications**

WHAT'S NEW

- IECEx certification.
- New enclosure with screwless front closure for easy cleaning of the indicator.
- PG7 and PG9 cable glands with adapters for 4 to 7 mm and 7 to 10 mm cable routing. Equipped with anti-friction system that does not require additional external cable fixing, as required by the IECEx scheme and ATEX directives.
- Available in specific version for direct connection to load cells installed in zone 1/21 and 0/20.

TECHNICAL FEATURES

- 5,7" colour touch screen display.
- Multilanguage software.
- 15-key alphanumerical waterproof keyboard.
- 3-way control light.
- Selectable QWERTY, AZERTY or QWERTZ keyboard integrated in the touch screen.
- Stainless steel waterproof enclosure, with new IP68 protection system.
- Dimensions: 280x143x185mm.
- Suitable for use on the table, column or wall.
- Real time clock and permanent data storage.
- Alibi memory as standard, integrated on the motherboard.
- Slot for built-in micro SD to record the configuration, logos, and customized screens (upon request).
- Functions available with DINI TOOLS utility
 - Configuration, data entry and print formatting.
 - Recording and filing of all the information on PC.
 - Complete retrieval of the configuration.
 - Instrument calibration with numeric values.
 - Customization of the screens.
- 24-bit A/D converter, 4 channels, up to 3200 conv./sec. with automatic frequency selection and up to 8 signal linearisation points.
- 4 independent analogue channels for weight reading (up to 2 in E-AF03 version).
- Connection with up to 16 analogue load cells of 350 Ohm (45 load cells of 1000 Ohm).
- Up to 10.000e OIML or multi-range 3 x 3000e @ 0,3 $\mu\text{V/d}$ CE-M legal for trade.
- Up to 1.000.000 displayable divisions for internal factory use, with internal resolution up to 3.000.000 points.
- Connectable to printers and labellers with free programming of the printout formats.
- Power supply from 110-240Vac line or 12-24 Vdc Max. 25.2W

COMPLETE PROGRAMMABILITY FOR CUSTOMISED APPLICATIONS

- Thanks to the integrated development area, fully customised applications can be created independently:
 - Specific weighing softwares according to customer requirements
 - Tailor-made weighing softwares to replace terminals in existing installations
 - Wizards, messaging for the operator
 - Serial port management, protocol customization
 - Complete digital I/O management
 - Sequential or simultaneous automations
 - Data entry, tailor-made archives

Dini Argeo also offers the service of software development (to be quoted).

STANDARD APPLICATIONS


- AF01: Totalization and formula weighing (standard)
- AF02: Piece/quantity counting (optional)
- AF03: Weighbridges - Vehicle In/Out (optional)
- AF04: Statistical check of prepackaged goods (optional)
- AF05: Price computing and industrial labelling (optional)
- AF08: Static wheel and axle weighing with 2 or more pads (optional)
- AF09: Software for dynamic or static axle weighing with 1 or 2 pads (optional)
- BATCH1: Single product dosage systems in loading and unloading (optional)
- BATCH: Software for multicomponent dosage systems in loading and unloading (optional, requires IOEXPB expansion board)

I/O SECTION

- 1 Internal serial ETHERNET port, for connection to the company computer system (excludes a serial port).
- 2 RS232 serial ports on terminals, for connection to printer, PC, radio module and optional interfaces.
- 1 RS485/RS232 serial port on terminals, for connection to weight repeater, remote scale, badge readers or digital load cells.
- 4 serial optoisolated outputs, up to 16 with optional board.
- 2 serial optoisolated inputs, up to 8 with optional board.
- External Profibus interface (optional), for automation management.
- Modbus RTU interface.
- Optional Bluetooth connection, for fast wireless programming of archives, via PC, tablet or smartphone.
- Analog output DAC16O requires IOEXPB expansion board.

CUSTOMIZABLE DISPLAYS

- Thanks to the programmable Touch Screen display, it is possible to create the interface tailored to each application:

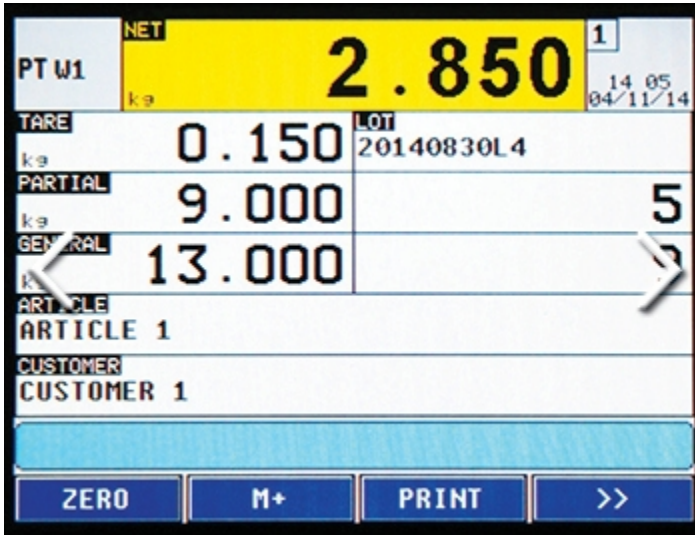


- The PC software "Dini Display Tool" allows for the quick customisation of the TOUCH display.




DETAIL 1



DETAIL 2

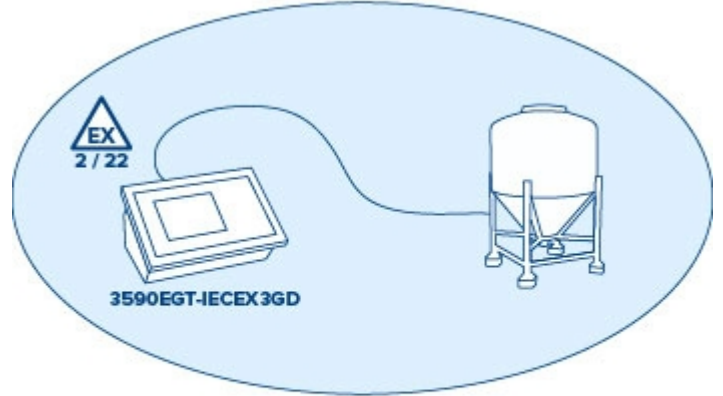

DETAIL 3

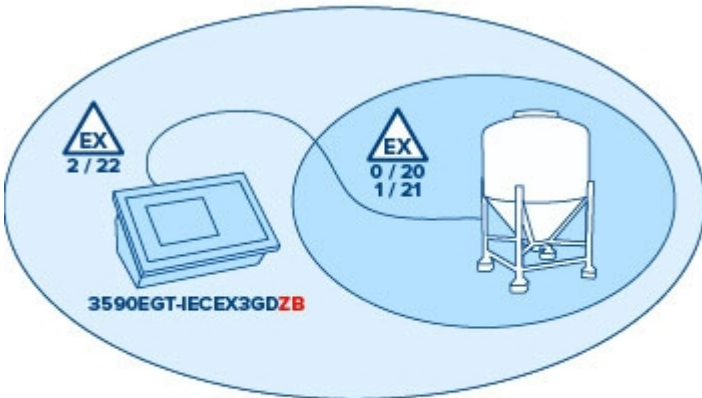

DETAIL 4



www.diniargeo.com

“YOUR WORLDWIDE PARTNER FOR WEIGHING”

DINI ARGEO
FRANCE sarl
France

DINI ARGEO
GMBH
Germany

DINI ARGEO
UK Ltd
United Kingdom

DINI ARGEO WEIGHING
INSTRUMENTS Ltd
China

DINI ARGEO
OCEANIA
Australia



COMPANY HEADQUARTERS

Via Della Fisica, 20
41042 Spezzano di Fiorano - Modena - Italy
Tel. +39.0536 843418

SCALETEC LTD

903 TREMAINE AVENUE - 4414 - PALMERSTON NORTH - NEW ZEALAND

Tel. 0064 6 3765041

tonyj@scaletec.co.nz

SALES AND TECHNICAL ASSISTANCE SERVICE

All the specifications and images can be subject to variations and upgrades without prior notice.